



310, NUTSHELL
300, LAWN
301, PINE GREEN


GB-007

SWG Mini-Putt Pro

A firm, high performance nylon putting turf with a slightly shorter pile height. Designed to provide a consistent and durable surface for short chips and pitch shots.



877.260.7888
www.southwestgreens.com

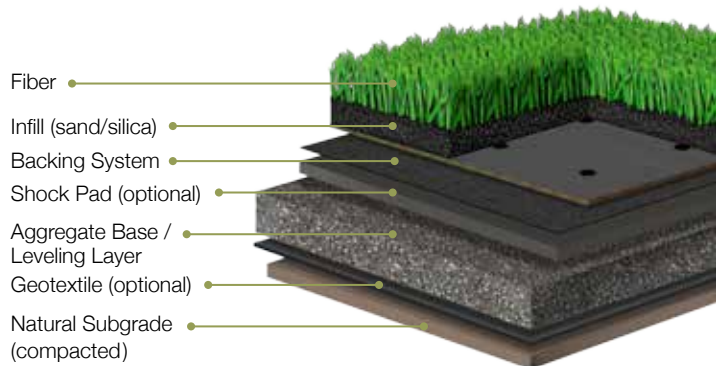

GB007

SWG Mini-Putt Pro



	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polypropylene
	Fiber Mass	5000 denier	5555 dtex	High Textured MF
	Finished Pile Height	.35 in	8.89 mm	
	Color(s)	Pine Green	Lawn Green	Turf Green
	Tufting Gauge	3/16 in		
	Primary Backing	7 oz/yd ²	237 g/m ²	Stabilized Woven Polypropylene
	Secondary Backing	17 oz/yd ²	576 g/m ²	Urethane
PERFORMANCE PROPERTIES	Tufted Face Weight	24 oz/yd ²	814 g/m ²	ATSM D418
	Total Weight	48 oz/yd ²	1627 g/m ²	ATSM D418
PACKAGING	Item Number			GB-007
	Roll Width	12 ft	3.65 m	

5 YEAR WARRANTY

Southwest Greens International warrants to the original purchaser of the turf that for five (5) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens International will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens International also warrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Slight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 5 year warranty agreement

* Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.

** Tufting gauge and stitch rate as manufactured standard. Values will change slightly during secondary backing process.

*** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.

**** All specifications subject to manufacturing tolerances of +/-5%.